#### PREDICTED ENERGY ASSESSMENT




Plot 074 Dwelling type: House, Mid-Terrace

Date of assessment: 04/11/2019
Produced by: Eloise Utley
Total floor area: 109.47 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO<sub>2</sub>) emissions.

## **Energy Efficiency Rating**

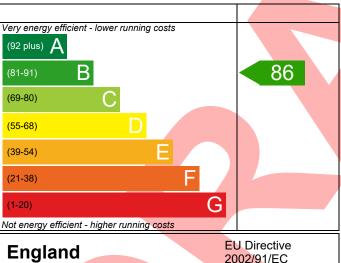

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

### **Environmental Impact (CO<sub>2</sub>) Rating**

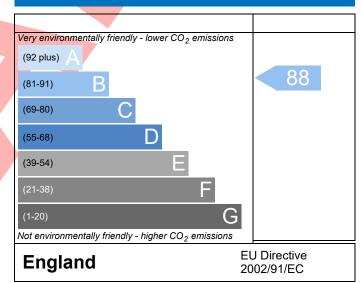

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO<sub>2</sub>) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



# **BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)**



Property Reference		3-074			1		Issued on Date	04/11/2019	
Assessment	074 Prop Type Ref 3BH2-B - Mid								
Reference Property	Plot 074								
	F10t 074			1					
SAP Rating			86 B	DER			TER	15.45	
Environmental			88 B	% DER <ter< td=""><td colspan="2"></td><td>4.10</td><td></td></ter<>			4.10		
CO₂ Emissions (t/year)			1.31	DFEE	40.98		TFEE	43.34	
General Requireme	ents Compliance		Pass	% DFEE <tf< td=""><td>EE  </td><td></td><td>5.43</td><td></td></tf<>	EE		5.43		
<b>Assessor Details</b>								T714-0001	
	mitchell.bennellick@	mitchell.bennellick@aessouthern.co.uk							
Client									
UMARY FOR INPUT	DATA FOR New Bui	d (As Desi	gned)						
Criterion 1 – Achievi	ing the TER and TFEE	rate							
1a TER and DER									
Fuel for main hea	ating		Mains ga	as	7	/			
Fuel factor			1.00 (ma	ins gas)	7				
Target Carbon Dioxide Emission Rate (TER)			15.45 kgCO						
Dwelling Carbon Dioxide Emission Rate (DER)			14.82   kgCO2/m2					Pass	
			-0.63 (-4	.1%)			kgCO <sub>2</sub> /m <sup>2</sup>		
Lb TFEE and DFEE									
Target Fabric Energy Efficiency (TFEE)  Dwelling Fabric Energy Efficiency (DFEE)			43.34				kWh/m²/yı		
			40.98				kWh/m²/yr		
			-2.3 (-5.3	3%)			kWh/m²/yı	Pass	
Criterion 2 – Limits o	on design flexibility								
Limiting Fabric S	tandards								
2 Fabric U-values	5								
Element		Avera	ge		Hig	hest			
External v	vall	0.21 (1	0.21 (max. 0.30)		0.2	5 (max. 0.70	0)	Pass	
Party wall			0.00 (max. 0.20)			-			
Floor		0.15 (r		0.1	Pass				
Roof			0.15 (max. 0.20)			0.19 (max. 0.35)			
Openings		1.38 (1	(max. 2.00) 1.40 (max. 3.3				0)	Pass	
2a Thermal bridge	ging								
Thermal bridg	ging calculated from I	inear ther	mal transmitt	cances for eac	ch jund	tion			
3 Air permeabilit	ty		_						
Air permeabil	ity at 50 pascals		5.01 (design value)				m³/(h.m²) @ 50 Pa		
Maximum			10.0				m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 F	a Pass	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.11r11

## **BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)**



	Boiler system with radiators or underfloor - Mains gas  Data from database	Pass
	Potterton ASSURE 36 COMBI	
	Combi boiler	
	Efficiency: 89.0% SEDBUK2009	
	Minimum: 88.0%	
Secondary heating system	None	
<u>5 Cylinder insulation</u>		
Hot water storage	No cylinder	
<u>6 Controls</u>		
Space heating controls	Time and temperature zone control	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy	100 %	
fittings		
Minimum	75 %	Pass
8 Mechanical ventilation		
Continuous extract system (decentralised)		_
Specific fan power	0.1700 0.1800	<u>_</u>
Maximum	0.7	Pass
Criterion 3 – Limiting the effects of heat gains in sun	nmer	
9 Summertime temperature		
Overheating risk (Thames Valley)	Slight	Pass
Based on:		
Based on: Overshading	Average	
Overshading Windows facing South East	5.21 m², No overhang	
Overshading	5.21 m², No overhang 6.73 m², No overhang	
Overshading Windows facing South East	5.21 m², No overhang	
Overshading Windows facing South East Windows facing North West	5.21 m², No overhang 6.73 m², No overhang	
Overshading Windows facing South East Windows facing North West Air change rate	5.21 m², No overhang 6.73 m², No overhang 4.00 ach	
Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains	5.21 m², No overhang 6.73 m², No overhang 4.00 ach	
Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains  Criterion 4 – Building performance consistent with I	5.21 m², No overhang 6.73 m², No overhang 4.00 ach	
Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains Criterion 4 – Building performance consistent with I	5.21 m², No overhang 6.73 m², No overhang 4.00 ach  None  DER and DFEE rate	Pass
Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains  Criterion 4 – Building performance consistent with I  Party Walls Type	5.21 m², No overhang 6.73 m², No overhang 4.00 ach None  DER and DFEE rate  U-value	Pass
Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains  Criterion 4 – Building performance consistent with I  Party Walls  Type Filled Cavity with Edge Sealing	5.21 m², No overhang 6.73 m², No overhang 4.00 ach None  DER and DFEE rate  U-value	Pass
Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains  Criterion 4 – Building performance consistent with I  Party Walls  Type Filled Cavity with Edge Sealing Air permeability and pressure testing	5.21 m², No overhang 6.73 m², No overhang 4.00 ach None  DER and DFEE rate  U-value	Pass
Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains  Criterion 4 – Building performance consistent with I  Party Walls  Type Filled Cavity with Edge Sealing  Air permeability and pressure testing  3 Air permeability	5.21 m², No overhang 6.73 m², No overhang 4.00 ach  None  DER and DFEE rate  U-value  0.00  W/m²K	Pass
Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains  Criterion 4 – Building performance consistent with I  Party Walls  Type Filled Cavity with Edge Sealing  Air permeability and pressure testing 3 Air permeability  Air permeability at 50 pascals	5.21 m², No overhang 6.73 m², No overhang 4.00 ach None  DER and DFEE rate  U-value  0.00 W/m²K  5.01 (design value) m³/(h.m²) @ 50 Pa	
Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains  Criterion 4 – Building performance consistent with I  Party Walls  Type Filled Cavity with Edge Sealing  Air permeability and pressure testing  3 Air permeability  Air permeability at 50 pascals  Maximum	5.21 m², No overhang 6.73 m², No overhang 4.00 ach None  DER and DFEE rate  U-value  0.00 W/m²K  5.01 (design value) m³/(h.m²) @ 50 Pa	
Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains  Criterion 4 – Building performance consistent with I  Party Walls  Type Filled Cavity with Edge Sealing  Air permeability and pressure testing 3 Air permeability  Air permeability at 50 pascals  Maximum  10 Key features	5.21 m², No overhang 6.73 m², No overhang 4.00 ach  None  DER and DFEE rate  U-value  0.00  W/m²K  5.01 (design value)  m³/(h.m²) @ 50 Pa  10.0  m³/(h.m²) @ 50 Pa	
Overshading Windows facing South East Windows facing North West Air change rate Blinds/curtains  Criterion 4 – Building performance consistent with I  Party Walls  Type Filled Cavity with Edge Sealing  Air permeability and pressure testing  3 Air permeability  Air permeability at 50 pascals  Maximum  10 Key features  External wall U-value	5.21 m², No overhang 6.73 m², No overhang 4.00 ach  None  DER and DFEE rate  U-value  0.00  W/m²K  5.01 (design value)  m³/(h.m²) @ 50 Pa  m³/(h.m²) @ 50 Pa	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.11r11

### **RECOMMENDATIONS**



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£31	B 87	B 89	Recommended
Photovoltaic	£3,500 - £5,500	£320	A 95	A 97	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£351	A 95	A 97	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

